

TK·CM

AIO PC & Monitor Catalogue

Shenzhen Sufeida Technology Co., Ltd

<https://www.monitortp.com>

Company Profile

Shenzhen Sufeida Technology Co., Ltd./Shenzhen Letouch Shijia Technology Co., Ltd. is a manufacturer specializing in the design and production of LCD LED displays, touch displays, e-sports displays, all-in-one computers, etc.

We have senior R&D engineers and senior managers. The project has fully automated production lines and testing equipment. Over the years, we have formed a complete set of independent core technologies, an innovative and efficient management system and comprehensive QC quality inspection. After professional research and development by the team, all products have passed national CCC, FCC, CE, RoHS and other certifications.

Shenzhen Sufeida Technology Co., Ltd./Shenzhen Letouch Shijia Technology Co., Ltd. adheres to the high-quality route and emphasizes product quality and after-sales service. The company adheres to the tenet of "quality assurance, professional service" and insists on providing customers with high-quality products. Our services have won domestic and foreign markets. With the strong support and recognition of the products, the products sell well in the United States, Egypt, India, Germany, South America, Africa, Europe and other countries and regions.

We will make unremitting efforts to create a better future together, continue to improve the scientific quality management system, and continue to work hard to gain more recognition. Friends from all walks of life are welcome to visit, provide guidance and negotiate business.





The logo for TK·CM, featuring the letters 'TK' in a stylized blue font followed by a dot and 'CM' in a similar blue font. The background of the entire slide is a photograph of a modern city skyline with several tall glass skyscrapers under a bright blue sky with scattered white clouds. A large white diagonal arrow shape points from the top-left towards the bottom-right, containing the text elements.

TK·CM

CONTENTS

1 Office Monitor

2 Gaming Monitor

3 AIO Computer

4 Touch Monitor



21.5-32 inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS21.5-23.8-27-32	Black / White	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz 144Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Power	2560*1440 @ 75Hz 144Hz 165Hz
800:1	H:178° V:178°	16.7M	HDMI/VGA	DC 12V	3840*2160 @ 75Hz 144Hz 165Hz

Office Monitor



23.8-27inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS23.8-27	Black	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz 144Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Power	2560*1440 @ 75Hz 144Hz 165Hz
800:1	H:178° V:178°	16.7M	HDMI/VGA	DC 12V	3840*2160 @ 75Hz 144Hz 165Hz

Office Monitor



23.8-27inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS23.8-27	Black	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz 144Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Power	2560*1440 @ 75Hz 144Hz 165Hz
800:1	H:178° V:178°	16.7M	HDMI/VGA	DC 12V	3840*2160 @ 75Hz 144Hz 165Hz

Office Monitor



27-32inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS27-32	Black / White	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz 144Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Power	2560*1440 @ 75Hz 144Hz 165Hz
1000:1	H:178° V:178°	16.7M	HDMI/VGA	DC 12V	3840*2160 @ 75Hz 144Hz 165Hz

Office Monitor



23.8-32inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS23.8-27-32	Black	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz 144Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Power	2560*1440 @ 75Hz 144Hz 165Hz
800:1	H:178° V:178°	16.7M	HDMI/VGA	DC 12V	3840*2160 @ 75Hz 144Hz 165Hz

Gaming Monitor



27-32 inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS27-32	Black	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz 144Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Power	2560*1440 @ 75Hz 144Hz 165Hz
1000:1	H:178° V:178°	16.7M	HDMI/VGA	DC 12V	3840*2160 @ 75Hz 144Hz 165Hz


Gaming Monitor



27 inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS27	Black	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz 144Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Power	2560*1440 @ 75Hz 144Hz 165Hz
1000:1	H:178° V:178°	16.7M	HDMI/VGA	DC 12V	3840*2160 @ 75Hz 144Hz 165Hz


Gaming Monitor

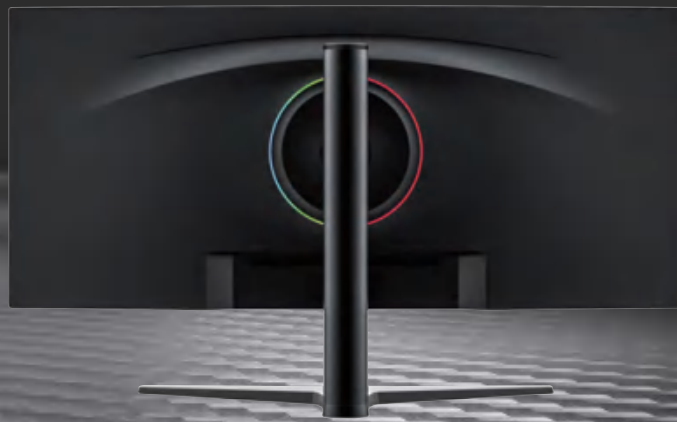

34 inch

Model	Product color	Screen proportion	Backlight source	Brightness	Resolution
TS3402	Black	(21:9)	TFT / LED	350cd/m2	3440*1440 @ 75Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Response Time	Specification
1000:1	H:178° V:178°	16.7M	HDMI/DP/Type-C USB-B/USB-A	1ms	Face to face without borders

Gaming Monitor

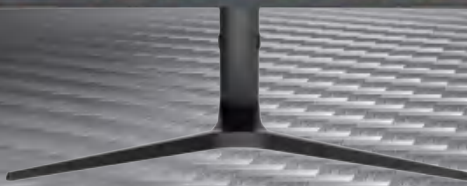

34 inch

Model	Product color	Screen proportion	Backlight source	Brightness	Resolution
TS3402Q	Black	(21:9)	TFT / LED	350cd/m2	3440*1440 @ 75Hz 165Hz
Contrat	Viewing angle	Color temperature	Signal interface	Response Time	Specification
1000:1	H:178° V:178°	16.7M	HDMI/DP/Type-C USB-B/USB-A	1ms	R1800

Gaming Monitor



49 inch

Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS4901	Black	(21:9)	TFT / LED	350cd/m2	5120*1440 @ 75Hz 144Hz
Contrat	Viewing angle	Color temperature	Signal interface	Response Time	Curvature
1000:1	H:178° V:178°	16.7M	HDMI/DP/Type-C USB-B/USB-A	1ms	R1800


Gaming Monitor



49 inch


Model	Product color	Screen proportion	Backlight	Brightness	Resolution
TS4902	Black	(21:9)	TFT / LED	350cd/m2	5120*1440 @ 75Hz 144Hz
Contrat	Viewing angle	Color temperature	Signal interface	Response Time	Curvature
1000:1	H:178° V:178°	16.7M	HDMI/DP/Type-C USB-B/USB-A	1ms	R1800

AIO PC

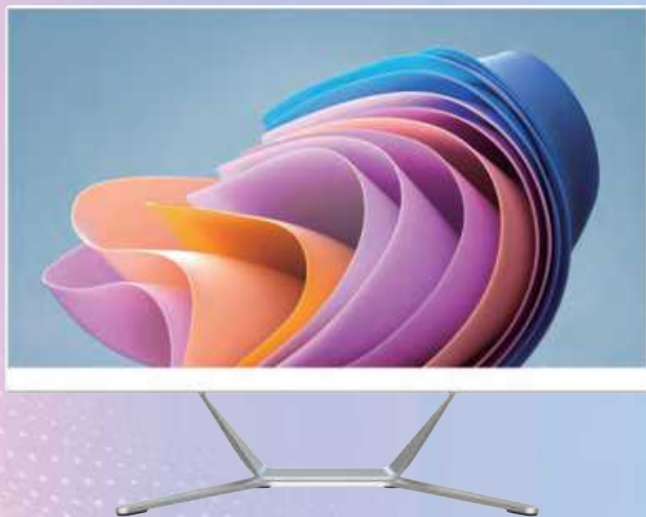

21.5-23.8 inch

Mainboard		Support	Camera	Backlight source	Screen proportion	Resolution
H55 H61 H65 H81 H110 H510		CPU HDD RAM	300M 500M	TFT / LED	(16:9)	1920*1080 @ 75Hz
Brightness	WIFI	Viewing angle	CD-ROM drive	Bluetooth	POWER SUPPLY	Signal interface
250cd/m2	5G/6G	H:178°V:178°	support	support	90W AC-DC-Adapter	VGA/HDMI/USB*6/RJ45 Audio/Type-C /SD

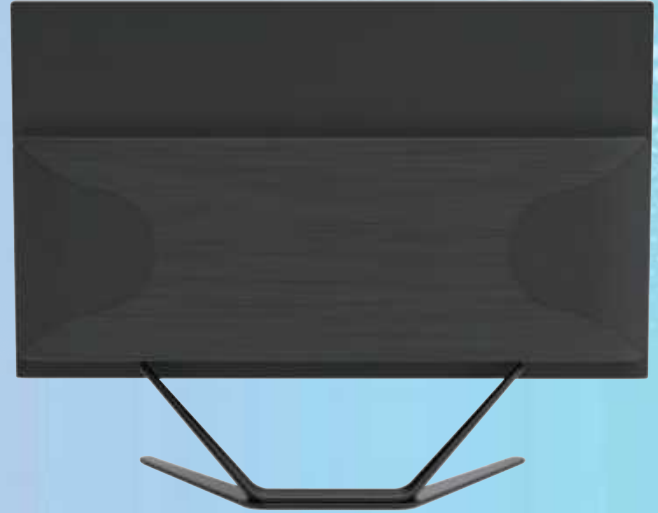

21.5-23.8 inch AIO PC

Mainboard		Support		Camera	Backlight source	Screen proportion	Resolution
H55 H61 H65 H81 H110 H510		CPU HDD RAM		300M 500M	TFT / LED	(16:9)	1920*1080 @ 75Hz
Brightness	WIFI	Viewing angle	CD-ROM drive	Bluetooth	POWER SUPPLY	Signal interface	
250cd/m2	5G/6G	H:178°V:178°	support	support	90W AC-DC-Adapter	VGA/HDMI/USB*6/RJ45 Audio/Type-C /SD	

AIO PC



23.8-27 inch AIO PC

Mainboard		Support	Camera	Backlight source	Screen proportion	Resolution
H55 H61 H65 H81 H110 H510		CPU HDD RAM	300M 500M	TFT / LED	(16:9)	1920*1080 @ 75Hz
Brightness	WIFI	Viewing angle	CD-ROM drive	Bluetooth	POWER SUPPLY	Signal interface
250cd/m2	5G/6G	H:178°V:178°	support	support	90W AC-DC-Adapter	VGA/HDMI/USB*6/RJ45 Audio/Type-C /SD



23.8-27 inch AIO PC

Mainboard	Support	Camera	Backlight source	Screen proportion	Resolution	
H55 H61 H65 H81 H110 H510	CPU HDD RAM	300M 500M	TFT / LED	(16:9)	1920*1080 @ 75Hz	
Brightness	WIFI	Viewing angle	CD-ROM drive	Bluetooth	POWER SUPPLY	Signal interface
250cd/m2	5G/6G	H:178°V:178°	support	support	90W AC-DC-Adapter	VGA/HDMI/USB*6/RJ45 Audio/Type-C /SD

AIO PC



23.8 inch AIO PC



Mainboard	Support	Camera	Backlight source	Screen proportion	Resolution	
H55 H61 H65 H81 H110 H510	CPU HDD RAM	300M 500M	TFT / LED	(16:9)	1920*1080 @ 75Hz	
Brightness	WIFI	Viewing angle	CD-ROM drive	Bluetooth	POWER SUPPLY	Signal interface
250cd/m2	5G/6G	H:178°V:178°	support	support	90W AC-DC-Adapter	VGA/HDMI/USB*6/RJ45 Audio/Type-C /SD



21.5-23.8 inch

Mainboard	Support	Camera	Backlight source	Screen proportion	Resolution	
H55 H61 H65 H81 H110 H510	CPU HDD RAM	300M 500M	TFT / LED	(16:9)	1920*1080 @ 75Hz	
Brightness	WIFI	Viewing angle	CD-ROM drive	Bluetooth	POWER SUPPLY	Signal interface
250cd/m2	5G/6G	H:178°V:178°	support	support	90W AC-DC-Adapter	VGA/HDMI/USB*6/RJ45 Audio/Type-C /SD

Touch Monitor

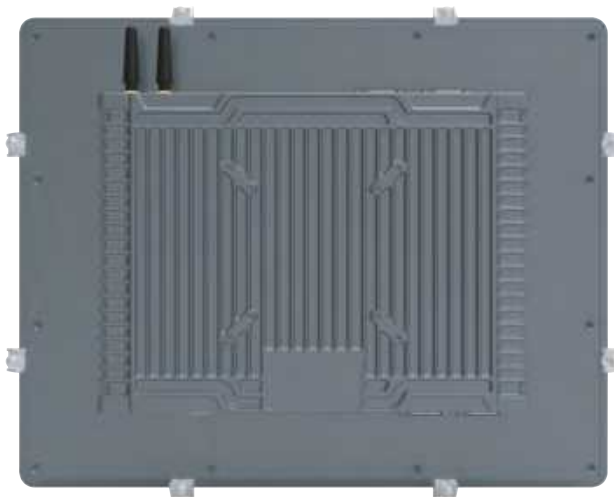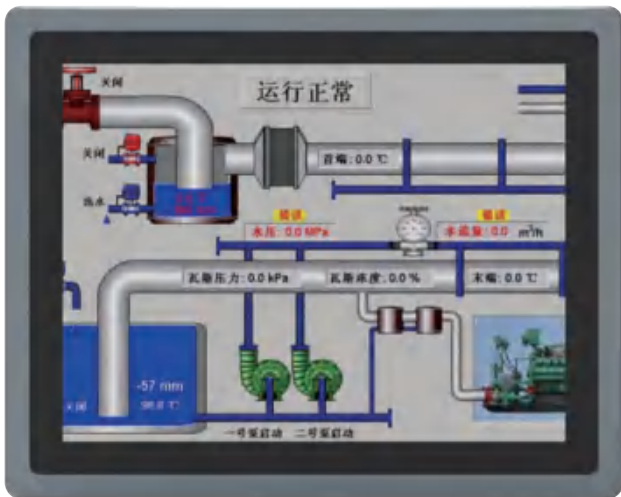

10.4-17 inch Touch Monitor

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC10/12.1/15/17	10-point Capacitive Touch	(4:3)	TFT / LED	250cd/m2	1024*768 @ 75Hz 1280*1024 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive



13.3-21.5inch Touch Monitor

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC13.3/15.6 18.5/21.5	10-point Capacitive Touch	(16:9)	TFT / LED	250cd/m2	1920*1080 @75hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive

Touch Monitor



Touch All-In-One Computer

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC 10/12/15/15.6 17/18.5/21.5/23.6	10-point Capacitive Touch	(4:3/16:9)	TFT / LED	250cd/m2	1024*768 @ 60Hz 1280*1024 @ 75Hz 1920*1080 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive



10-19 inch Open Monitor

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC15/17/19	10-point Capacitive Touch	(4:3)	TFT / LED	250cd/m2	1024*768 @ 60Hz 1280*1024 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive

Touch Monitor



10-19 inch Open Monitor

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC10/13/15 17/19	10-point Capacitive Touch	(4:3)	TFT / LED	250cd/m2	1024*768 @ 60Hz 1280*1024 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive



15-19 inch Touch Monitor

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC15/17/19	10-point Capacitive Touch	(4:3)	TFT / LED	250cd/m2	1024*768 @ 60Hz 1280*1024 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive

Touch Monitor



15-19 inch Touch Monitor

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC15/17/19	10-point Capacitive Touch	(4:3)	TFT / LED	250cd/m2	1024*768 @ 60Hz 1280*1024 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive



21.5 inch Touch All-In-One Computer

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC21.5/23.8	10-point Capacitive Touch	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA/HDMI USB*6/RJ45/Audio	XP/Win7/ Win8 Win10/Linux	USB Drive

Touch Monitor



Touch All-In-One Computer

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC15.6/21.5	10-point Capacitive Touch	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive



Touch All-In-One Computer

Model	Capacitance touch	Screen proportion	Backlight source	Brightness	Resolution
TRC18.5/21.5/27 32/43/49/65	10-point Capacitive Touch	(16:9)	TFT / LED	250cd/m2	1920*1080 @ 75Hz
Armoured glass	Viewing angle	Chip	Signal interface	Support system	Other interfaces
TP/G+G	H:178° V:178°	ILITEK2511	VGA+HDMI	XP/Win7/ Win8 Win10/Linux	USB Drive

Shenzhen Sufeida Technology Co., Ltd.
Shenzhen Le Touch Shijia Technology Co., Ltd.

TK·CM



Tel: +86 18566758749



Tel: +86 19925413433



Email: cnsfdlhx@monitortp.com



Website: <https://monitortp.com>



605, Workshop C, No.1, East Industrial District, Shangxue Science park
Xinxue Community, Bantian Street, Longgang District, Shenzhen, China